



Sensors Transmitters

Pressure / Temperature / Humidity / Air velocity / Airflow / Air quality / Solar / Light



European Manufacturer
www.kimo.fr



Sensors Transmitters

Pressure / Temperature / Humidity / Air velocity
Airflow / Air quality / Solar / Light

Designed and manufactured in France, KIMO range of transmitters is perfectly suitable for any industry, process, building services, indoor climate, OEM...

KIMO offers many models: from the simplest to the most complete, suitable for any application, with easy configuration and calculation functions. Innovating range: the interchangeable measuring elements enable easy maintenance and on-site calibration.



All our datasheets
available on www.kimo.fr/sensors

New products

Monostats / Class 110 / Class 210 / Class 310



Simplified calibration
Monostats/Class 110

Electronic board and measuring element connected to the front side of the sensor, which allows to configure and calibrate your device without causing any damage.



Front PC connection
Monostats/Class 110

This new range has a front side input to allow you to configure the sensor via a PC equipped with the LCC-S software.



Keypad configuration
Class 210

The new class 210 has a keyboard on the front side which allows configuration without modifying the sensor installation.



Perforated housing for
ambient sensors



Automatic
autozero



Power supply
LED



CO/CO₂
sensors



Light/solar
transmitters



Atmospheric
pressure

Software LCC-S

LCC-S software allows the configuration of new sensors monostats, class 110, class 210 and class 310.

You can select your units, ranges, relays, alarms, time-delays, outputs, channels, setpoints...



Summary

New products

Monostats
p. 04

New products

Class 210
p. 10

Display
p. 16

Probes
p. 18

New products

Class 110
p. 06

Class 310
p. 12

Akivision
p. 17

Useful info
p. 19

New products

Monostats

Applications: **Refrigeration - Air conditioning**

Quick installation and easy to set up, monostats enable to trigger a relay when you reach the predefined threshold and to send this information via the relay on the regulation system or an automaton for example.



Thermostats TST

TEMPERATURE

Measuring range
From -100 to +400°C



- Duct probe
- Remote probe

Hygrostats HST

HUMIDITY

Measuring range
From 5 to 95 %RH
From -20 to +80°C



1

Sensor with remote probe



2

ABS or stainless steel duct probe



3

Perforated housing for integrated ambient probe IP20



Manostats PST

PRESSURE

Measuring range

From ± 100 Pa to ± 2000 mbar



COstats COST

CO RATE

Measuring range

From 0 to 500 ppm



CO₂stats CO2ST

AIR QUALITY

Measuring range

From 0 to 5000 ppm

New products

Class 110

Applications: **Refrigeration - Air conditioning - Industries - OEM**

Covering the whole measuring parameters, this communicating range releases a current or voltage signal. To meet the needs of any type of application, sensitive elements are available as ambient, remote or duct. Analogue outputs are automatically adapted to the configured measuring scale via dip switches on the devices or via LCC-S software.



1 or 2 analogue outputs



Waterproof
ABS housing



Power supply
24 Vdc/Vac



Configurable outputs



AUTOZERO

Differential pressure transmitters



Pressure
CP110

111
112
113
114
115

Atmospheric pressure
CP116



TH 110

TEMPERATURE
HUMIDITY

Measuring range
From 5 to 95 %RH
From -20 to +80°C



HM 110

HUMIDITY

Measuring range
From 5 to 95 %RH



CTV 110

AIR VELOCITY

Measuring range
From 0 to 30 m/s
From 0 to +50°C



CP 110

PRESSURE

Measuring range
From ± 100 Pa to ± 2000 mbar



CP 116

ATMOSPHERIC
PRESSURE

Measuring range
From 800 to 1100 hPa



TM 50

TEMPERATURE

Measuring range

From -100 to +400°C



TM 110

TEMPERATURE

Measuring range

From -100 to +400°C



CO 110/CO 112

AIR QUALITY

Measuring range

CO: From 0 to 500 ppm

CO₂: From 0 to 5000 ppm




Perforated housing for
ambient sensors



Duct
probe



Remote
probe

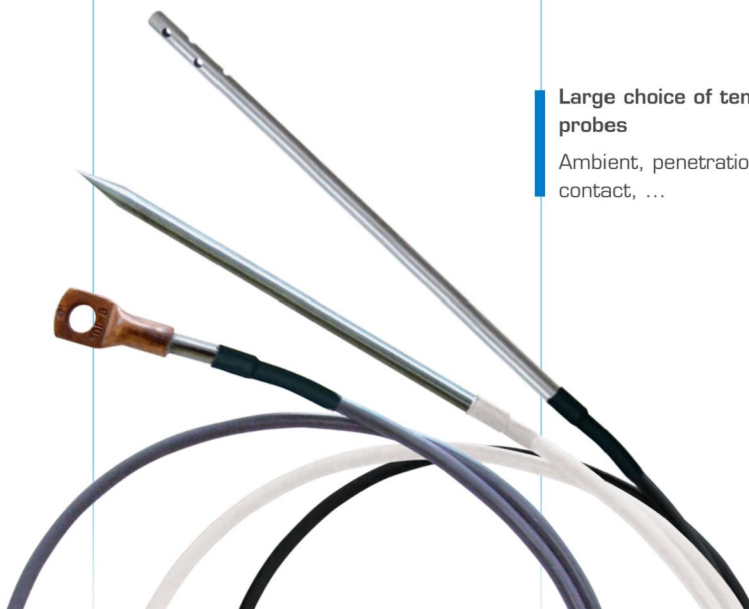

Large choice of temperature probes

Ambient, penetration, bent, contact, ...



LR 110

LIGHT

Lighting and electrical products manufacturers


Architecture (office, administration, shop...)

Control, maintenance and visual confort

Food industry and sylviculture

Measuring range

From 0 to 10 000 lux

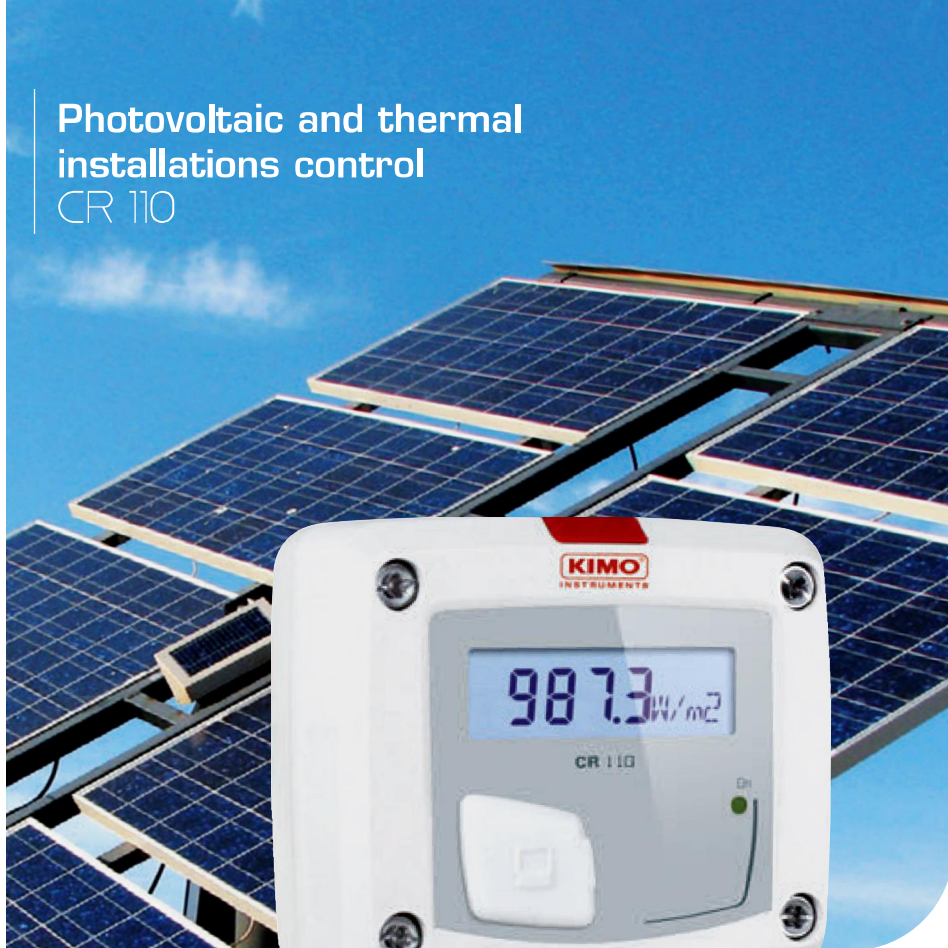

Waterproof
ABS housing



CR 110

SOLAR

Measuring range

From 0 to 1500 W/m²

CR 110 allows to:

- Proceed to sunshine surveys
- Determine the correct power supply which must be used (photovoltaic or thermal)
- Check the installation conformity
- Estimate the energetic power produced

New products

Class 210

Applications: **Industries - Laboratories**

Equipped with airtight and strong ABS housing, these sensors have a large 2-line backlit LCD display, and a keyboard on front face for configuration.

Multi-parameter and provided with advanced calculation functions, this range offers a global reading and delivers accurate information on the conditions of your air / thermal process.



2 analogue outputs



Waterproof
ABS housing



Power supply
24 Vdc/Vac - 115/230 Vac



Control and measurement of air quality

Minimal global airflow of fresh air

Respects the limits

Atmosphere monitoring

Ventilation and cleaning up control

...



COT 210/212

CO/CO₂ TEMPERATURE

Measuring range

CO: From 0 to 500 ppm

CO₂: From 0 to 5000 ppm

From -20 to +80°C



CP 210

PRESSURE TEMPERATURE AIR VELOCITY & AIRFLOW

Measuring range

From ±100 Pa

to ±2000 mbar

From -100 to +400°C

From 0 to 100 m/s





Configurable
outputs



Calculation
functions





Password
locking



Ambient probe



Remote probes

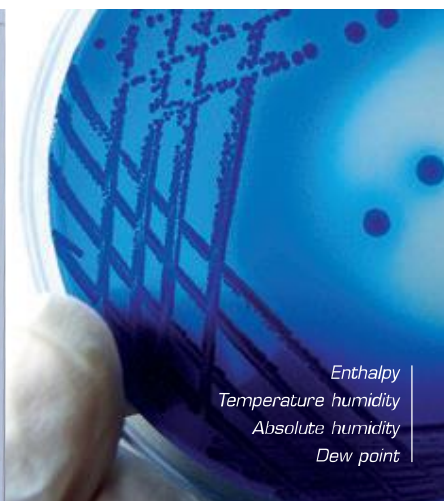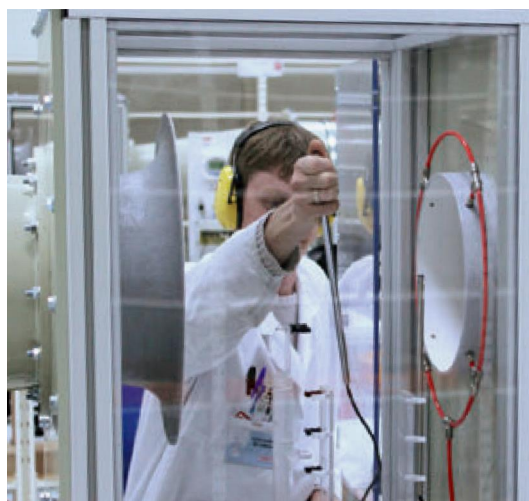

CTV 210

AIR VELOCITY & AIRFLOW

Measuring range
From 0 to 30 m/s
From 0 to +50°C



TH 210

HUMIDITY TEMPERATURE

Measuring range
From 5 to 95 %RH
From -40 to +180°C



TM 210

TEMPERATURE

Measuring range
From -100 to +400°C

✓
HVAC

NEW GENERATION

Class 310 Multifunction

Pressure/Humidity/Temperature/Air velocity/Airflow/Air quality

4 visual and audible alarms

Graphic display

Software or keypad configuration

With or without display

Easy and quick installation



Waterproof
ABS housing



2 Analogue
Outputs



4 RCR relays
card (option)



Ethernet
Communication



MODBUS
RS 485



2 INPUTS
for probes

Measure up to
4 parameters

Interchangeable
Probes



C 310

MULTIFUNCTION

Interchangeable pressure
modules SPI-2

SPI2-100 : ± 100 Pa


SPI2-500 : ± 500 Pa

SPI2-1000 : $\pm 1,000$ Pa

SPI2-10000 : $\pm 10,000$ Pa

SPI-ATMO : 800 to 1,100 hPa

1 INPUT
for module

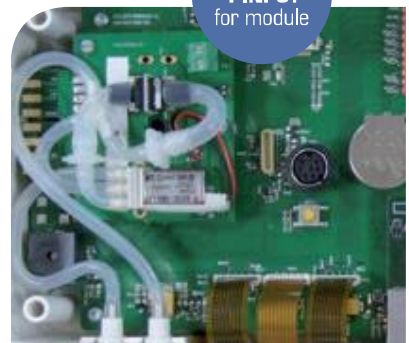



C310 Graphic Display



HISTORICAL
graphics display




TREND MARKUP



UP TO 4 PARAMETERS
simultaneously



Our range of transmitters can be managed within a Modbus network (RS 485 system). You can also integrate our transmitters to your existing network.

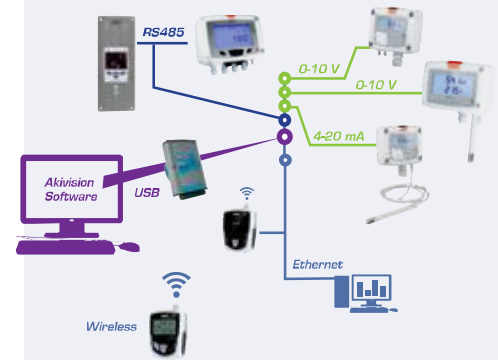

- MODBUS Network (option)**
- Ethernet Communication (option)**
- Configurable analogue outputs**



Learn More
See page 16.



Interchangeable Probes

C 310 / CPE 310-S / CA 310

Unclip - Clip - Measure !

Easy and quick change of measurement element.
Automatic recognition.

Pressure.....	From 0-10 Pa to 10,000 Pa
Humidity	0 to 100 %RH
Temperature	-50 to +180°C
Air Velocity.....	0 to 35 m/s
Airflow.....	0 to 99,999 m³/h
CO	0 to 500 ppm
	0 to 20,000 on demand
CO ₂	0 to 5,000 ppm
Current/Voltage.....	4-20 mA / 0-10 V

Easy Clip



Flush-mount

Multifunction pressure sensor

✓
ADJUSTMENT
certificate



1 INPUT
for probe



3 audible/visual
alarms



Tenth
Resolution



MODBUS
RS 485



Output
Diagnostic



3 Analogue
Outputs



*Interface for configuration
software and front calibration*

CPE 310 S


MULTIFUNCTION

**Multifunction flush mount
transmitter**

Measuring range
-100 to +100 Pa

1 Input for interchangeable
probes (see probes page 13)

alternative display

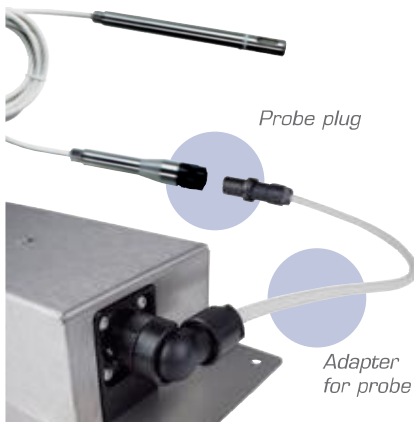

Probe plug

Adapter
for probe



LCC-S
Configuration software
(option)

LCC-S software allows the configuration of new class 310 sensors. You can select your units, ranges, relays, alarms, time-delays, outputs, channels, set points...

Multifunction sensor

Large display transmitter



CA 310

1 slot for SPI-2 or MVA card
3 RCR relays
3 analogue outputs :
0-5/10 V ou 0/4-20 mA
3 visual and audible alarms

1 Input for interchangeable probes
(see probes page 13)

MULTIFUNCTION



Tenths
Resolution



Ethernet
Communication



MODBUS
RS 485




ATE 300

MULTI-CHANNEL DISPLAY

Flush-mount
Display 3 parameters alternatively.
RS485 Modbus



Airflow accessories

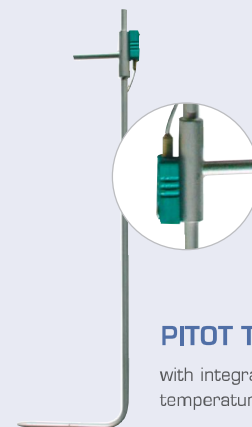

PITOT Tube

with integrated
temperature probe



DEBIMO
Measuring blades



SQR3 function

Calculation of air velocity and airflow from
the differential pressure.

Data acquisition System

Applications: **Refrigeration - Air conditioning - Industries - Offices**

New AKIVISION data acquisition system comes to complete current KIMO range of transmitters and was specially developed to monitor air movement conditions in many applications such as service sector, cleanrooms... It is perfectly suitable for process monitoring and control of air.

NEW SOFTWARE



**INTUITIVE
Synoptic
DISPLAY**

*New synoptic view for
a comprehensive real-
time of your installation*

*Graphic display from
the datasets*



Up to
255 devices
over network



**Real-time
Alarm**



**Ethernet
Communication**



Wireless datalogger
Kistock RF compliant



**MODBUS
RS 485**

AKIVISION SOFTWARE

CONFIGURATION & ACQUISITION

Configure all transmitters and modules of your installation, record and display measurements in real time.

Configuration of instruments and modules

User access management

Configuration and display of acquisition



*All our ranges of
sensors, dataloggers
and temperature
sensors are compatible.*

VISUALIZATION & OPERATION

Process, consult, analyze and print all measured data.



Data processing and exportation

Alarms log


Remote lookup and display of your records

SETUP EXAMPLE

hospital application

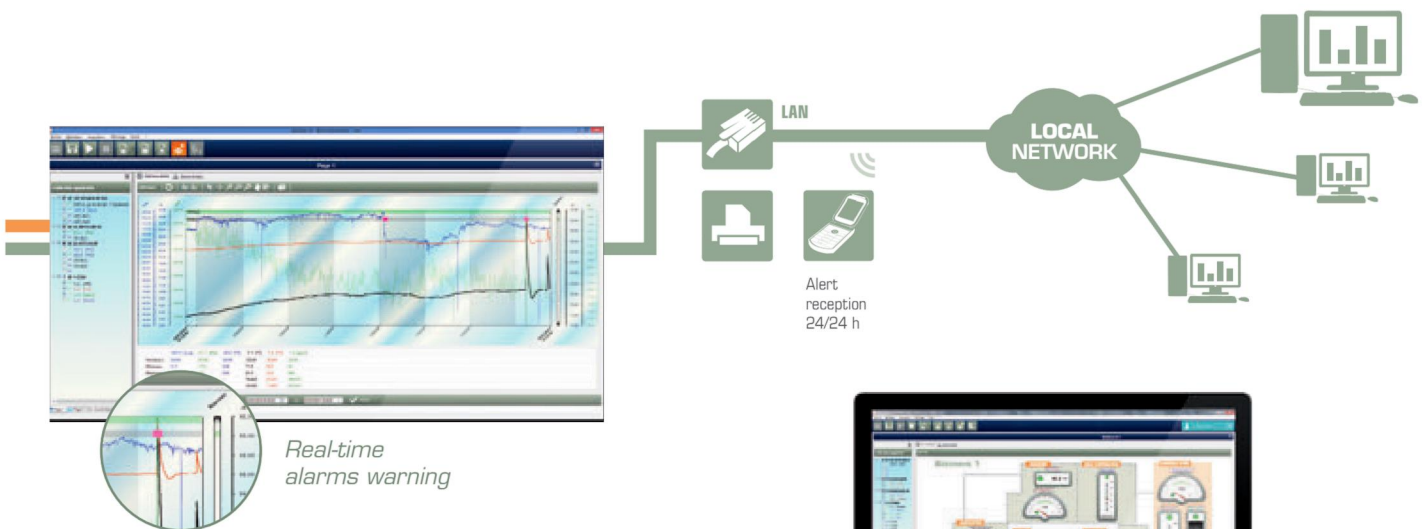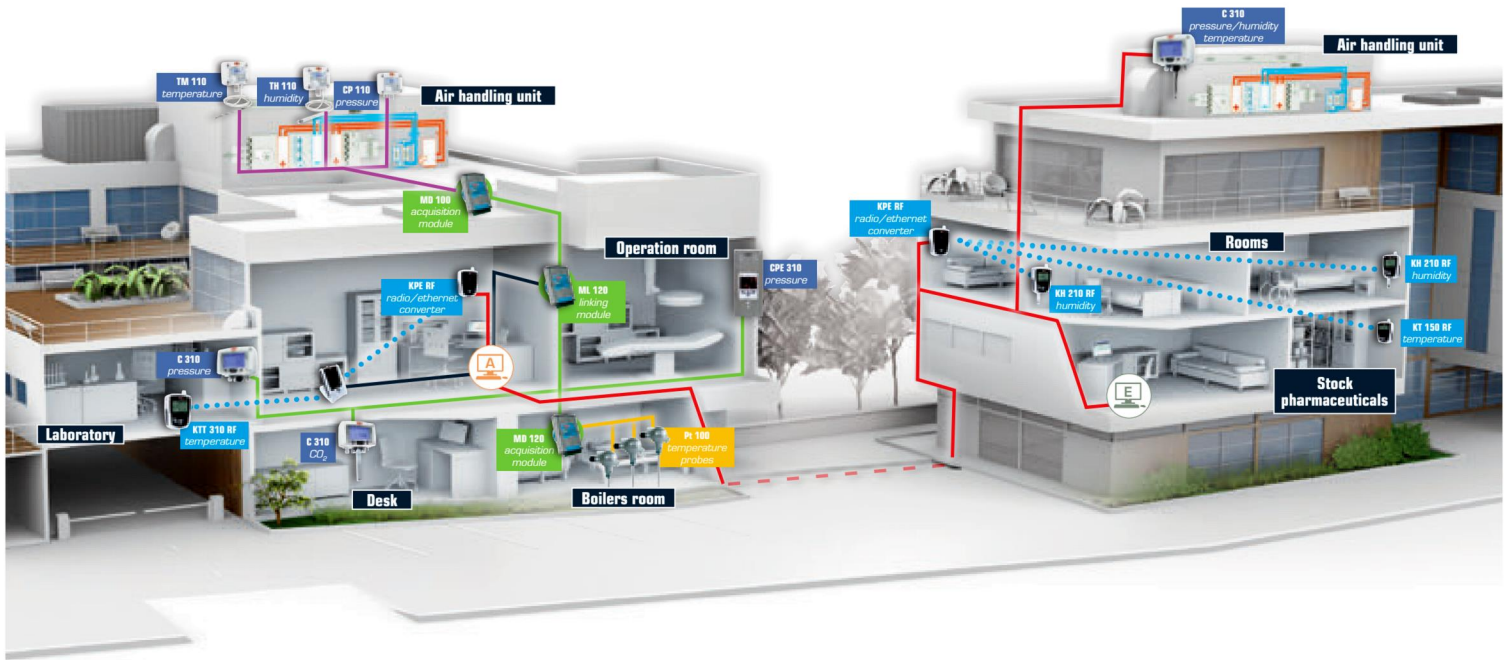

Easy setup, efficient monitoring of air movement condition, clean and cold rooms, test benches...

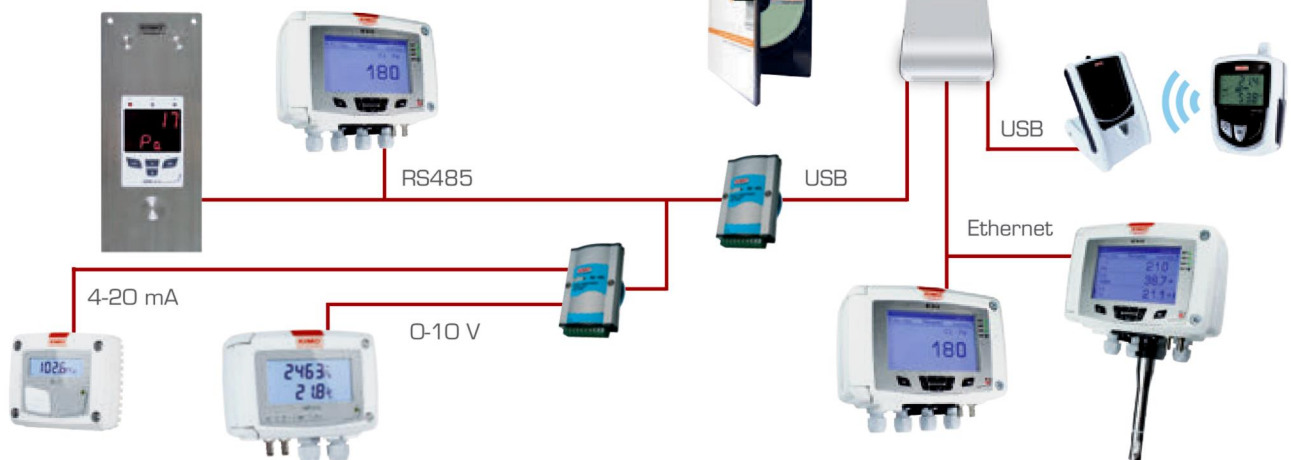

Temperature probes

Applications: **Air conditioning - Industries - Food industry**

Thermocouple K, J, T, N probes

Pt 100 / Pt 1000 probes

NTC probes



Connection head

Your need, your probe

Your application is specific,
we manufacture your
customized probe.
CONTACT US !

Alu / Noryl® / Stainless steel head

Stainless steel, heat resisting steel or
mineral insulated sheath, Alard coating...


Single pair or multipair

Pipe contact

Interchangeable probe system

Aggressive application

Heat-resisting steel protector

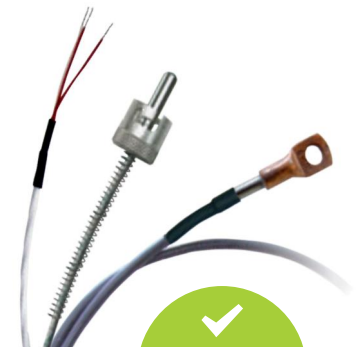

Wire probes

Output DIN connector
With fixing fitting
With cable

✓
**STANDARD or
CUSTOM-MADE**

PVC / Silicon / Teflon® / Glass silk cable

Stainless steel hose

Wire mounting: 2, 3, 4, 6 wires

Single pair or multipair




Accessories

- Thermocouple connectors (K, J, T, N...)
- Snap-on connectors for thermocouple
- Connector panel for snap-on connectors
- Converters




- Mounting brackets
- Stainless steel thermowells
- Watertight connections



Useful information

Range **Sensors - Transmitters**

Power supply



Transmitters with Passive loop

Principle: the transmitter is supplied with a continuous voltage => we measure the current used by the transmitter. This current varies between 4 and 20 mA, proportionally to the measured parameter (pressure, temperature, relative humidity...).

Active transmitter

Principle: the transmitter provides a current (4-20 mA) or a voltage (0-10 V) loop. It can work in either direct (DC) or alternative current (AC). The power supply connected to the transmitter enables it to generate a current of 4-20 mA or a voltage of 0-10 V proportional to the measured parameter.


Humidity transmitters

Capacitive humidity sensor

Principle: the dielectric constant of the humidity sensor varies according to the ambient humidity. This information is then relayed to the transmitter and converted into a digital value. The measuring signal is not affected by the ambient pressure.

Digital humidity sensor (class 300)


Principle: the dielectric constant of the humidity sensor varies according to the ambient humidity. This information is then relayed by the micro-controller to the transmitter and converted into a digital value.

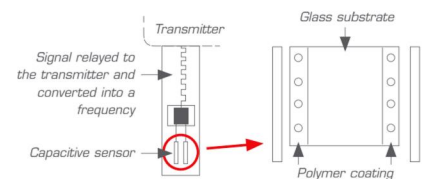

Smart-Pro



System

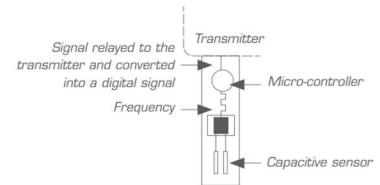

Temperature transmitters

Pt100

Principle: a Pt100 sensor is a resistance, with positive temperature coefficient, which varies according to the temperature. The value of the resistance varies according to the increase of the temperature.


For 0°C $\approx 100 \Omega$

For 100°C $\approx 138,5 \Omega$



Thermocouple


Principle: a thermocouple works thanks to voltage drop across dissimilar metals which are placed in contact. This voltage is proportional to the measured temperature.



Pressure transmitters

Principle

A pressure transmitter (piezoresistive type) makes a voltage proportional to the pressure applied on the transmitter.



Security

Secured installation

Locking system with access code, to secure the installation.


Electromagnetical

The KIMO transmitters comply with the EMC norm.




DISCOVER ALL OUR PRODUCT RANGES


on www.kimo.fr

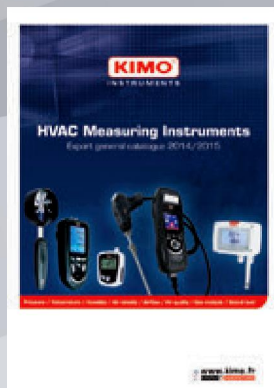


General Catalogue

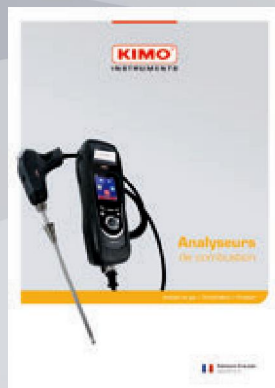

Combustion gas
Analysers

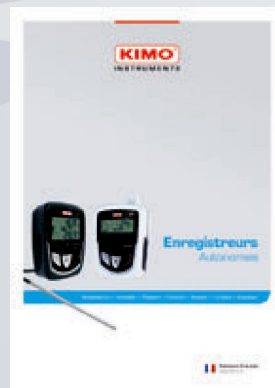

Dataloggers

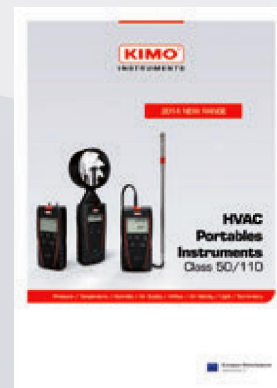

HVAC Portable
Instruments

EXPORT SALES DEPARTMENT

KIMO represented worldwide



www.kimo.fr



KIMO - Export Sales Department
Tel: +33 1 60 06 69 25 - Fax: +33 1 60 06 69 29
Email: export@kimo.fr

Distributed by: